



Submersible Water Storage Sterilizer

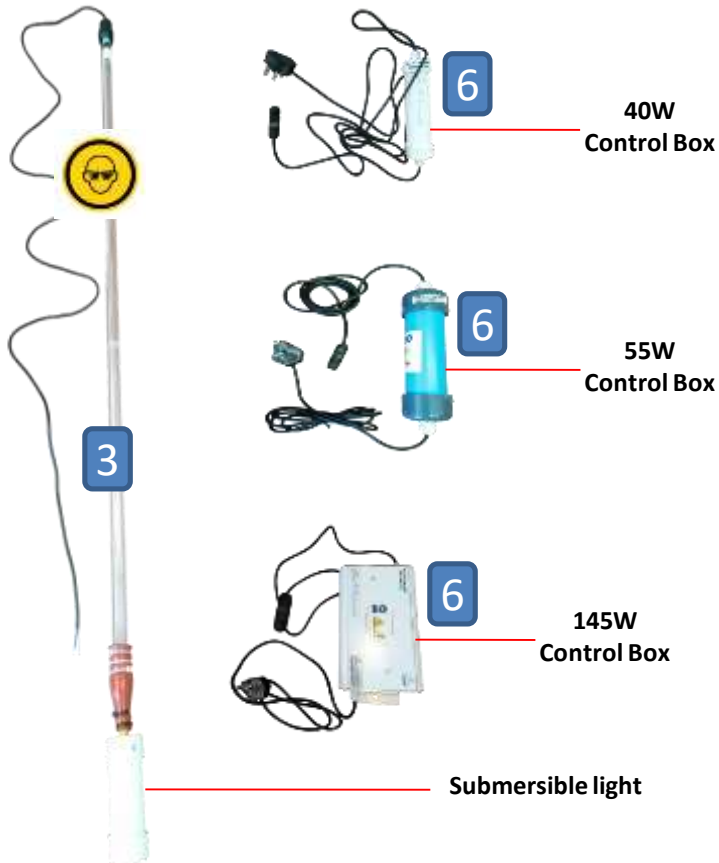

- . Wear safety Eyewear before handling
- . Do not power ON the unit until fully installed
- . Avoid UV exposure to skin, eyes, people or animals outside the tank
- . In case quartz(glass) is broken within the tank during installation, stop water supply into the tank. Drain and clean the tank immediately
- . Faulty units can be exchanged at Store
- . Broken units can be exchanged at a charge
- . Spare lamps for maintenance can be purchased at Store
- . Disconnect power before maintenance

Components Breakdown:

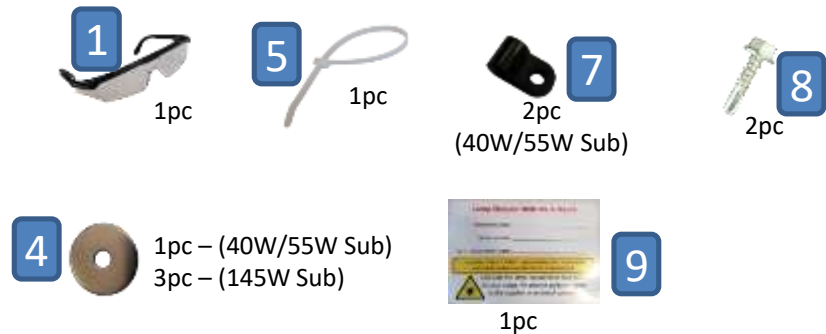

Instructions:

Wear safety Eyewear 1 avoid powering ON until installed.

1. Drill opening : Drill an **8mm** hole **2** on the top of the tank, opposite the water inlet, close to the wall or power supply. Ensure no drill shavings fall into the tank.

2. Insert Submersible : Carefully lower the Submersible light **3** through the main Tank lid, position the lamp 5cm above the full water level.

3. Cable securing : From inside the Tank, guide the Submersible cable through the drilled hole. Place the Fender washer **4** over the cable to close the hole. Fasten with a Cable tie **5** above the Washer to prevent slipping of the Unit. Apply silicone sealant around the Washer to reinforce and prevent leaks.

4. Electrical connection : Connect the Submersible cable to the IP68 waterproof connector on the Control Box **6**: Ensure correct wiring:

40W & 55W Submersibles : (L-Live = Brown , N-Neutral = Blue)

145W Submersibles : (1 & 2 = Brown , N & \perp = Blue)

Tighten all Cable glands to maintain waterproof seal.

5. Mount Control Box : Wall-mount using P-Clips **7** or Fender Washers and Tek-screws **8** provided. Ensure the LED light on the Control Box is visible when powered ON. If the power supply is behind a wall, drill a hole through, remove the plug top, guide cable through and re-fit the plug top.

6. Final Setup : Place the maintenance sticker **9** on a visible area (tank or wall). Routine maintenance : replace the lamp every 9000 effective hours/24 months.

7. Optional : Connect to a timer switch depending on tank size, water usage and UV model. You can get guidance in **STORE** or **TECHNICAL ASSISTANCE**.



CAUTION

**UV Light Do Not
Look Directly At
Light**

Technical Assistance

011 462 5525

081 726 8412