



ATMS1601


Function

- Program timer, can set 100 On/Off programs one day or per week.
- Count down time, from 1 Min to 23 hours 59 Mins.
- If the product is disconnected from the network, the timer retains all programs set up by Mobile App and works according to the set programs.
- With memory function, When the product contact is in the close state, after the power failure, and then call, the product contacts still keep the close state.
- Also can controlled by buttons from terminal A1 and A2.
- Can be share with 100 peoples by Mobile App.
- The product can works with Amazon Alexa and Google Home.


Technical data

Rated Voltage: 100-240VAC 50-60Hz
 Rated Current: 16A 250VAC(COSφ=1)
 Contact configuration: 1NO(SPST-NO)
 WiFi Frequency: 2.4GHz
 Mounting: DIN Rail 35 mm(EN 60715)
 Ambient temperature range: -10℃...+60℃


Control the timer by Mobile App

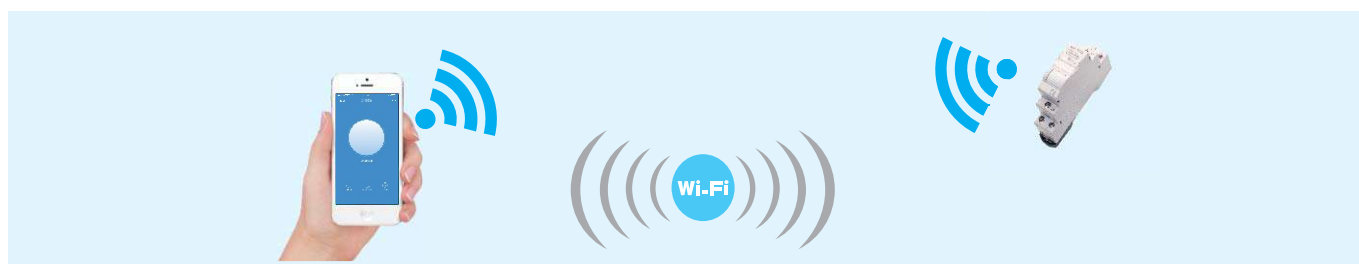

Connection Diagrams

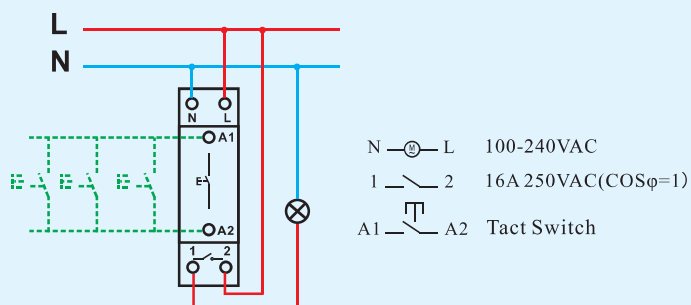

Dimensions

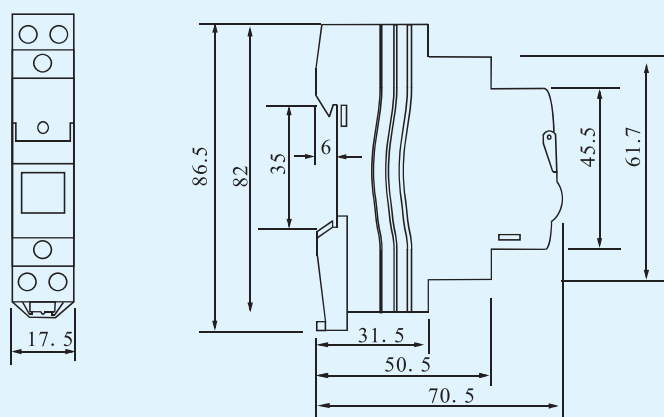

WiFi Smart Timer & Electricity Meter



ATMS1602

Function

- Program timer, can set 100 On/Off programs one day or per week.
- Count down time, from 1 Min to 23 hours 59 Mins.
- If the product is disconnected from the network, the timer retains all programs set up by Mobile App and works according to the set programs.
- With memory function, When the product contact is in the close state, after the power failure, and then call, the product contacts still keep the close state.
- Also can controlled by buttons from terminal A1 and A2.
- Can be share with 100 peoples by Mobile App.
- In the App can display: Today Ele (KWh), Current Ele (mA), Current Power (W), Current Voltage (V), Total Ele (KWh)
- Over current protection function: If the load is greater than 17A, the product will cut off the circuit automatically.

Technical data

Rated Voltage: 100-240VAC 50-60Hz

Rated Current: 16A 250VAC(COSφ=1)

Contact configuration: 1NO(SPST-NO)

WiFi Frequency: 2.4GHz


Mounting: DIN Rail 35 mm(EN 60715)

Ambient temperature range: -10℃...+60℃

Control the timer by Mobile App



Connection Diagrams

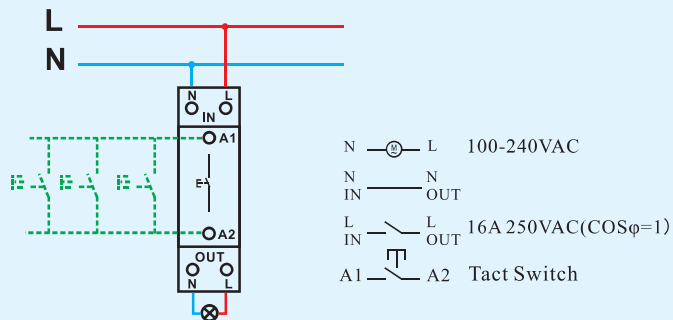

Dimensions

